

<b>CHAPTER 15.12: DIMENSIONAL STANDARDS .....</b>	<b>1</b>
<b>15.12.000 Table of Dimensional Standards .....</b>	<b>1</b>
15.12.000.A Agricultural District Standards .....	1
15.12.000.B Residential District Standards .....	2
15.12.000.C Non-Residential District Standards.....	3
15.12.000.D Overlay and Other District Standards.....	4
<b>15.12.010 Measurements and Exceptions .....</b>	<b>5</b>
15.12.010.A Lot Dimensions .....	5
15.12.010.B Setbacks .....	6
15.12.010.C Height.....	8
15.12.010.D Dimensional Standards for Townhouse Structures .....	9

## CHAPTER 15.12: DIMENSIONAL STANDARDS

### 15.12.000 TABLE OF DIMENSIONAL STANDARDS

This section contains tables that list the requirements for lot dimensions and building bulk, density, location, and height for all types of development. All primary and accessory structures are subject to the dimensional standards set forth in the following tables. These general standards may be further limited or modified by other applicable sections of this Code. General rules for measurement and exceptions are in section 15.12.010.

#### 15.12.000.A Agricultural District Standards

TABLE 15.12-1: DIMENSIONAL REQUIREMENTS – AGRICULTURAL DISTRICTS						
District	Lot Dimensions		Setbacks			Max. Height
	Lot Area	Minimum Lot Frontage (ft)	Front (ft)	Rear (ft)	Side (ft)	
<b>AG</b>	35 acres	100	30	30	30	40 [1]
[1] For agricultural and industrial uses, the height limit shall be 100 feet.						

**15.12.000.B Residential District Standards**

<b>TABLE 15.12-2: DIMENSIONAL REQUIREMENTS – RESIDENTIAL DISTRICTS</b>							
<b>District</b>	<b>Lot Dimensions</b>		<b>Use</b>	<b>Setbacks</b>			<b>Max. Height (ft)</b>
	Min. Lot Area (sq ft)	Minimum Lot Width (ft)		Front (ft)	Side (ft)	Rear (ft)	
<b>RR</b>	16,000	75	Principal Building	35 [1]	10	10	40
			Accessory Building	60	5	5	24 [2]
<b>LR</b>	7,000	60	Principal Building	25 [1]	5	7	40
			Accessory Building	45	5	3	24 [2]
<b>R1</b>	5,000	50	Principal Building	20 [3]	5	5	40
			Accessory Building	45	3	3	24 [2]
<b>R2</b>	6,000 per principal building, except townhouse 3,500 per unit 6,000 min. land area per townhouse structure [4]	60 per principal building, except townhouses 24 per townhouse[5]	Principal Building	25 [3]	5	5	40
			Accessory Building	45	3	3	24 [2]
<b>R2M</b>	4,800 per principal building, except townhouse 3,500 per unit 6,000 min. land area per townhouse structure [4]	40 per principal building, except townhouses 24 per townhouse[5]	Principal Building	25 [3]	5	5	40
			Accessory Building	45	3	3	24 [2]
<b>R3</b>	6,000 per principal building, except townhouses 1,000 per unit 6,000 min. land area per townhouse structure [4]	60 per principal building, except townhouses 16 per townhouse [5]	Principal Building	15 [3]	5	5	50
			Accessory Building	45	3	3	15

[1] Front setback for principal structure may be reduced by up to 10', for equivalent increased setback of front-loading garage from right-of-way: see subsection 15.14.080.C.(4).  
 [2] Also shall not exceed the height of the associated principal structure pursuant to subsection 15.10.020.C.3.  
 [3] Front setback for principal structure may be reduced by up to 5', for equivalent increased setback of front-loading garage from right-of-way: see subsection 15.14.080.C.(4).  
 [4] The land area may include one or multiple lots.  
 [5] The minimum dimension for a townhouse structure shall be 60' as measured perpendicular to the common walls.

**15.12.000.C Non-Residential District Standards**

**TABLE 15.12-3: DIMENSIONAL REQUIREMENTS – NONRESIDENTIAL DISTRICTS**

District	Lot Dimensions		Setbacks			Max Height (ft)
	Min. Lot Area	Min. Lot Width (ft)	Front (ft)	Side (ft)	Rear (ft)	
<b>NB</b>	3,600 sq. ft.	40	0	0	3	35
<b>B1</b>	N/A	40	0	0	3	50
<b>B2</b>	N/A	40	0	0	3	65
<b>DC</b>	N/A	40	0	0	3	Pursuant to subsection 15.08.030.E
<b>C2</b>	N/A	40	0	0	3	65
<b>LM</b>	N/A	40	0	0	3	65
<b>IP</b>	1 acre	40	30	30	15	45
<b>I1</b>	N/A	40	0	0	3	35
<b>I2</b>	N/A	40	0	0	3	65
<b>O</b>	10 acres	100	0	0	3	50
<b>TO</b>	1 acre	40	30	30	15	Pursuant to subsection 15.08.030.L

(Ord.

1637 § 3, 2013)

**Overlay and Other District Standards**

The following table sets forth only the dimensional standards where they are specified for the city’s overlay and other districts. All other district-specific standards are set forth in chapter 15.08, Zone Districts.

**TABLE 15.12-5: DIMENSIONAL REQUIREMENTS – OVERLAY AND OTHER DISTRICTS**

District	Lot Dimensions		Setbacks			Max Height (ft)	
	Min. Lot Area (sq ft)	Min. Lot Width (ft)	Front (ft)	Side (ft)	Rear (ft)		
TTO	See underlying zone district	See underlying zone district	40 [1]	20 [1]	20 [1]	40	
GO	See underlying zone district	See underlying zone district	20	See underlying zone district	3	See underlying zone district	
ROB	See R3 or B1/B2 dimensional standards set forth in Table 15.12-2 or Table 15.12-3, as applicable to use(s)						
PUD	As determined pursuant to subsection 15.08.040.C						
AV	Airport Runways, Taxiways, and Related Facilities	N/A	N/A	750	750	750	50, or as restricted by FAA requirements
	Helicopter Take Off and Landing Areas	N/A	N/A	300	300	300	50, or as restricted by FAA requirements
	All Other Buildings	N/A	N/A	25 from local street on corner lot, 50 from collector, arterial, or state highway	15 25 from local street on corner lot, 50 from collector, arterial, or state highway	15	50, or as restricted by FAA requirements
AE	Airport Runways, Taxiways, and	3,000	30	750	750	750	0

**TABLE 15.12-5: DIMENSIONAL REQUIREMENTS – OVERLAY AND OTHER DISTRICTS**

District	Lot Dimensions		Setbacks			Max Height (ft)
	Min. Lot Area (sq ft)	Min. Lot Width (ft)	Front (ft)	Side (ft)	Rear (ft)	
Related Facilities						
Helicopter Take Off and Landing Areas	3,000	30	300	300	300	0
All Other Buildings	3,000	30	25 from local street on corner lot, 50 from collector, arterial, or state highway	15, 25 from local street on corner lot, 50 from collector, arterial, or state highway	15	50, or as restricted by FAA requirements

[1] The dimensional standards for the Turner Tract Overlay District are applicable only to non-residential structures.  
 (Ord. 1596 § 62, 2011)

**15.12.010 MEASUREMENTS AND EXCEPTIONS**

This chapter contains tables that list the requirements for lot dimensions and building bulk, density, location, and height for all types of development. All primary and accessory structures are subject to the dimensional standards set forth in the following tables. These general standards may be further limited or modified by other applicable sections of this Code.

**15.12.010.A Lot Dimensions**

**1. Established Lots**

- a. Where an individual lot was held in separate ownership from adjoining properties, or was platted and recorded as of the effective date of this Code, and has less area and/or less width than required in other sections of this chapter, such a lot may be occupied according to the permitted uses provided for the district in which such lot is located, provided that development shall be in conformity with all remaining applicable dimensional standards in this Chapter. For purposes of this exception, two adjacent platted lots each 24 feet in width may be considered one 48 foot lot.
- b. Notwithstanding subsection (a) of this section, townhouse development shall meet existing lot dimension requirements except that on established lots as described in subsection (a), the minimum land area per townhouse structure shall be 4,000 square feet and the minimum street frontage per townhouse structure shall be 40 feet, and there shall be no minimum lot area per townhouse lot (Ord. 1596 § 42, 2011).

**2. Allotments Must Serve Single Purposes**

No part of an area or width required for a lot for the purpose of complying with the provisions of this section shall be included as an area or width required for another building.

### 3. Street Frontage

Except in townhouse developments, no lot shall have a front lot line or street frontage of less than 40 feet.

#### 15.12.010.B Setbacks

##### 1. General Setback Requirements

###### a. Setbacks Must Serve Single Purposes

No part of a setback required for any building for the purpose of complying with the provisions of this division shall be included as a setback for another building.

###### b. Measurement of Setbacks

All setbacks shall be measured from property boundaries or adjacent rights-of-way.

###### c. Required Setbacks

- (i) Setbacks shall be unoccupied and unobstructed by any structure or portion of a structure from 30 inches above grade upward; provided, however, that fences, walls, trellises, poles, posts, ornaments, furniture, and other customary yard accessories may be permitted in any setback subject to height limitations and requirements limiting obstruction of visibility.
- (ii) A building, structure, or lot shall not be developed, used, or occupied unless it meets the minimum setback requirements set forth in this chapter for the zoning district in which it is located, except as otherwise established in this Code or unless a variance has been granted.

###### d. Projections into Required Setbacks, General

###### (i) Incidental Architectural Features

Cornices, eaves, canopies, sunshades, gutters, chimneys, flues, belt courses, headers, sills, pilasters, lintels, ornamental features, and other similar architectural features may project not more than two feet into any required setback provided these projections are at least three feet from the lot line.

###### (ii) Fire escapes

Fire escapes may extend into a required setback not more than six feet.

###### (iii) Paved Terraces

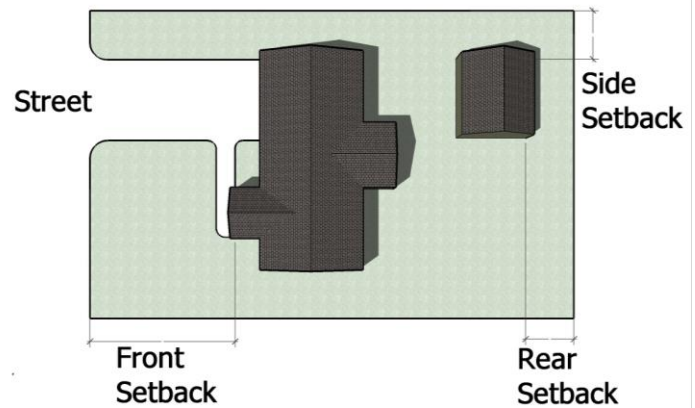


Figure 15.12-1: Front, Side, and Rear Setbacks

Paved terraces may project into any required setback, provided that no structures placed there shall violate other requirements of this Code and are at least five feet from the lot line.

**(iv) Unroofed Landings, Decks, Stairs, and Balconies**

Unroofed landing, decks, and stairs shall not project into more than 50% of a required setbacks, provided that no portion other than a handrail shall extend higher than 30 inches above the finished grade level. Unroofed balconies may project into a required side or rear setback provided these projections are at least five feet from the lot line.

**(v) Roofs Over Porches and Other Exterior Approaches**

Roofs over porches, stairways, landings, terraces, or other exterior approaches to pedestrian doorways may encroach up to five feet into a front setback, provided that, where such roof projections encroach within the setback, the roof projections shall comprise no more than 50 percent of the total length of the building's façade. The covered porch or entrance area encroaching into the setback shall remain exterior to the building and enclosed by no more than a railing.

**(vi) Projections Into Easements and Rights of Ways Prohibited**

Projections shall not extend or encroach into any easement(s) or right(s)-of-way.

**(vii) Handicap Ramps**

The City Manager's Office may allow the installation of handicap access ramps in required front, side, and rear setbacks (Ord. 1728 § 16, 2017).

**(viii) Bay Windows**

Bay windows that are not more than eight feet in width (where the projection breaks the plane of the wall) may project no more than two feet into any required setback, so long as there is a five-foot radius offset to any opposing bay window on the adjacent lot. Notwithstanding any other provisions of this Code, bay windows shall not be included in determining lot coverage (Ord. 1625 § 12, 2012).

**(ix) Private Garages and Carports**

A private garage or carport may project into a required setback abutting a public alley not to exceed one-third the distance of the required setback, in accordance with other requirements of this Code (Ord. 1596 § 43, 2011).

**e. Double-Frontage Lots, Excluding Corner Lots**

**(i) Existing Lots**

Where lots comprising seventy-five (75) percent or more of the frontage on one side of a street between intersecting streets have been improved with buildings at the effective date of this ordinance, the front setback shall be on the dominant side of the street. Dominant, in this subsection, shall mean the street frontage on which seventy-five (75) percent of the existing structures are addressed.



**(ii) New Lots**

The front lot line shall be designated on the final plat. A double frontage lot shall be required to have only one front setback.

**(iii) Alternative Front Lot Line**

The procedure for alternative front lot line designation shall follow the procedures set forth for conditional use in subsection 15.06.060.E.3; provided, however, that the provisions of 15.06.060.E.3.d shall not apply as they pertain to published and posted public-notice requirements. The provisions of 15.06.060.E.3.d shall apply as they pertain to written public-notice requirements, except that written notice of the request need only be mailed to adjacent property owners not including consideration of right-of-way at least ten days prior to scheduled consideration by the planning commission. The planning commission shall accept and consider written and/or oral public comment in consideration of the request; however, the consideration shall not be deemed a “public hearing” under 15.06.060.E.3.e.(i) or as elsewhere determined by this Title (Ord. 1596 § 59 & 60, 2011).

**f. Corner Lots with Two Frontages**

**(i) Corner Lots**

The side setback along the street side of a corner lot shall be one-half the front setback requirement for the zone in which the lot is located.

**(ii) Corner Sight Distance**

On any corner lot on which a front and side setback are required, no wall, fence, hedge, structure, sign, or any plant growth that obstructs the clear vision area shall be permitted.

**2. Minimum Front Setbacks on Established Residential Blocks**

- a.** In any LR, R1, R2 or R3 District where lots comprising fifty (50) percent or more of the frontage on one side of a street between intersecting streets have been improved with buildings at the effective date of this code per Sec. 15.02.030, the minimum front setback of new construction shall be the same as the minimum front setback of any existing buildings in the block, or the minimum front setback for the district specified in Sec. 15.12.000.B, whichever is less (Ord. 1596 § 41, 2011).

**15.12.010.C Height**

**1. Height Requirements Generally**

No building shall be erected or altered that will exceed the height limit for the respective zoning district, unless otherwise provided in subsection b. below or elsewhere in this Code.

**2. Height Measurement**

Per chapter 15.28, Definitions, the height of a building shall be the vertical distance from the grade to the highest point of the roof surface.

### **3. Height Exceptions**

#### **a. Maximum**

The height limitations of this section shall not apply to church spires, belfries, cupolas, penthouses, nor to chimneys, ventilators, skylights, water tanks, parapet walls, cornices without windows, antennas, or necessary mechanical appurtenances usually carried above the roof level; nor to buildings located more than one foot from the nearest lot line for each two feet of building height.

#### **b. Minimum**

No person shall build within the city any basement, placing thereon a roof or any covering to serve as a roof and use such basement for either dwelling or business purposes, whether temporary or permanent.

### **15.12.010.D Dimensional Standards for Townhouse Structures**

1. The minimum dimension for a townhouse structure and for a contiguous series of accessory buildings shall be 60 feet as measured perpendicular to the common walls.
2. The maximum dimension for a townhouse structure and for a contiguous series of accessory buildings shall be 180 feet as measured perpendicular to the common walls.
3. Platted lots abutting dedicated streets in which water and sanitary sewer service lines have, as of the date of adoption of the ordinance codified in this section, been installed to fit a plan for townhouse construction are exempt from the requirements of subsections 1 and 2 above of this section.